Lamons ISOTEK Gasket Ordering Guide

When ordering ISOTEK products the following information is needed to determine proper gasketing kit for application.
Nominal Pipe Size, Flange information, Flange schedule. Special consideration for: Media, Design temp, Application. Please consult Lamons ISOTEK literature for design specifications.

Lamons Isolation Gasket Options

Gasket Option	Seal Options	Gasket Type	Retainer Options	Sleeve	Isolation Washers	Back up Washer
Isomate	EPDM	E	Neoprene Phenolic	Mylar	Phenolic	ZP
Isoguard	Viton	F	Phenolic	G10	G10	304
Defender	Nitrile		G10	G11	Mica	316
Defender Fire Safe	Teflon		G11	Mica		
			G7			

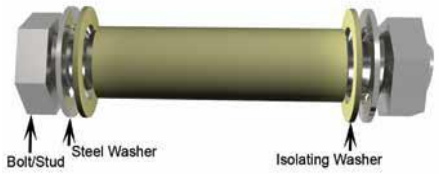

Flange information needed: Raised Face, Flat Face, ANSI, AWWA, API, RTJ, Slip On, Spacer (consult Lamons rep), Other
For flanges over 24" in addition to the above please specify flange series.
All ISOGUARD™ isolation gaskets are ID specific to eliminate corrosion-based fluid trap at the ID of the flange.
Non-conductive lube will be provided in Isolation kits unless otherwise specified.

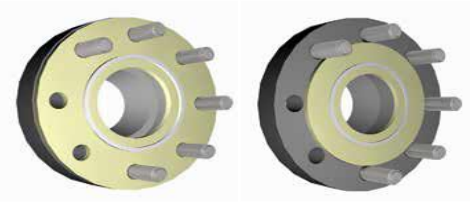

Type E **Type F**

QTY	NPS	Flange Class	Gasket Style	SCH	Retainer	Seal	Gasket Type	Isolation Washer	Back up Washer	Sleeve	Flange RF - FF